

QUICKSTART GUIDE

Edera 126 / 157 / 10 / 13

Thank you for purchasing an Edera 126 / 157 / 10 / 13 scooping cabinet.

This guide is designed to ensure you get the optimum performance from your Edera 126 / 157 / 10 / 13 scooping cabinet at all times.

By positioning and operating the cabinet correctly and then following a few steps to look after it, your Edera 126 / 157 / 10 / 13 scooping cabinet will run properly and efficiently.



Edera 10 / 13



Edera 126 / 157

Actual size of gap required at the rear and sides of the cabinet

Positioning Your Cabinet

- The cabinet should be positioned on a flat, level surface.
- Make sure there is a 10cm air space all around the scooping cabinet.
- Please note the cabinet will not perform in ambient temperatures over 30°C.
- Site the cabinet away from external sources of heat, eg. radiators, direct sunlight etc.

10cm gap all around




Operating Your Cabinet

- The cabinet should be left to stand for 4 hours after delivery before being plugged in for the first time.
- The cabinet should be plugged into a suitable 13 amp electrical supply. It should be plugged directly into the mains supply socket and **not attached** to an extension lead or adaptor.
- It will take approximately 24 hours for the cabinet to get down to the required temperature. Ice Cream should not be put inside the cabinet until temperature has been reached.
- Once plugged in and switched on at the mains and the on / off switch the cabinet will begin to work

Operating Your Cabinet continued...

- Do not exceed the load line on the inside of the cabinet. Doing so will result in reduced performance of your cabinet.
- Always keep the storage door / serving hatch closed whenever possible.
- The load line is approximately 2cm higher than the Napoli pan when the Napoli pan is in the display.


Temperature Adjustment

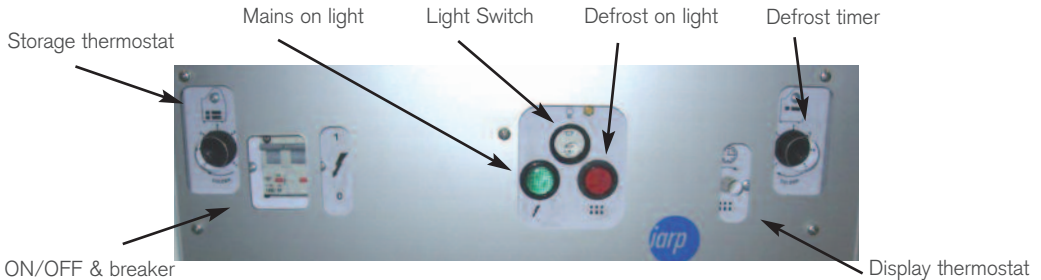

- If the correct temperature is not being maintained then adjustments to the cabinet can be made.
- The display thermostat can be found on the right of the rear control panel, a flat blade screwdriver will be needed. To adjust the temperature turn the dial by 1 increment clockwise for colder, and anticlockwise for warmer. Leave for 2 hours then check and repeat if needed. The storage unit has a similar thermostat on the left side of the control panel, which operates in the same way.
- Leave the cabinet for 2 hours and then check the temperature again. Repeat this process if more adjustment is required.

Looking After Your Cabinet

- **Health & Safety:** Before checking and cleaning the condenser the unit should be isolated by unplugging it.
- The condenser should be checked monthly, and if needed cleaned by a suitably qualified person.
- **Caution:** Before removing the compressor housing cover, always isolate the unit by completely removing the plug from the power supply. All work on the electrical system and the refrigeration system must be performed by suitably qualified staff.
- Always keep the internal spacers in place and never leave gaps.
- As soon as an ice cream tub becomes empty it must be replaced or the empty tub left in place until it can be replaced.

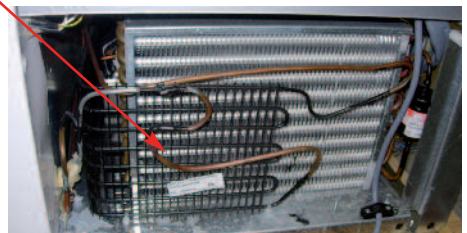

Looking After Your Cabinet - Defrost

- When ice begins to build up on the evaporator (approximately 1cm or ½ inch thick) this indicates that defrosting is required. This should be carried out at least once every six months.
- Empty the cabinet of all products, isolate the unit by completely removing the plug from the power supply and open the storage door / serving hatch.
- Never use sharp implements to scrape the ice as this may damage the walls.
- When the ice has melted and drained away dry off any residual moisture with a soft cloth.

Extra Defrosting

- Your cabinet will automatically defrost twice a day. During times of exceptional humidity it may need an extra defrost.
- To add an extra defrost in times of high ambient temperature when frost may form quicker, place a flat blade screwdriver into the defrost slot on the control panel. Turn clockwise until it stops and then release. This will add a 15 minute defrost. Note the cabinet may take several hours to return to its optimal temperature.

Problem Solving

In the unlikely event that your cabinet is not operating to its optimum performance, you are responsible for ensuring that the following basic checks have been carried out **before** calling out an engineer.

Cabinet not running correctly:

1. Check the electrical supply.
2. Check the fuse in the mains plug is OK.
3. Check the thermostat has not been lowered or turned off.
4. If the cabinet is plugged into an extension lead, unplug it and plug directly into the mains supply.

Cabinet is not at the correct temperature:

1. Check that a good air space has been left around the cabinet.
2. Check the storage door / serving hatch has not been left open.
3. Check the cabinet is not near a heat source.
4. Check the load line has not been exceeded.
5. Check the thermostat has been set correctly.
6. Check if there is a build up of ice inside.
7. Check the condenser grille is not blocked with dust or debris.

Your light tube will eventually need replacing and you will need to purchase a new one.

Internal display: 30w T8 Daylight Light tubes are available from The Light Bulb Co. Tel: 01869 362 222

Warranty

Your cabinet is supplied with a 12 month parts and labour warranty to protect you against manufacturers defects. If you need assistance please call:

Total Refrigeration Customer Service Department on 0845 127 2527

In order to log a service call you will need to provide the serial number for the cabinet at fault. This can be found on the information plate that is located on the back of the cabinet. Use this space to make a note of the serial number for future reference using a ball point pen:

SERIAL NUMBER

Please note that the basic checks detailed in this guide are usually excluded from the warranty. See standard terms and conditions for further information.

Non-warranty calls will be charged for.

If you are in any doubt contact our Customer Services Department.

Cabinet Contents Insurance

Please note that your cabinet warranty excludes any liability for loss of product or your insurance excess no matter how caused.

We recommend that you check your Store Policy to ascertain if you are covered for such an eventuality and if not then take separate insurance.

It is recommended that you leave your cabinet switched on for 24 hours before placing stock inside.

Waste Electrical & Electronic Regulations (WEEE)

In accordance with the WEEE regulations, Total Refrigeration is responsible for the final disposal of all equipment purchased on or after the 13th August 2005 - customers will be charged for the distribution costs at the time of collecting the unit.

For equipment purchased before 13th August 2005 Total Refrigeration will make a commercial charge on the customer which covers both the disposal of the unit(s) and the associated distribution costs.

